




# DATA SHEET

## EXPANDED PTFE : YG- EXFLON SHEETING

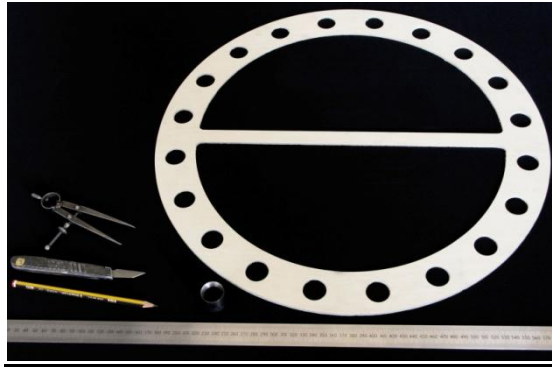

### DESCRIPTION

EXFLON Expanded PTFE sheeting is a stable and resistant material, chemically inert, non flammable with a high dielectric strength. Manufactured from 100% Virgin PTFE (Polytetrafluoroethylene). The isotropic expansion process completely eliminates the need for binders, fillers or pigments. The material is engineered to replace all filled PTFE gasket sheet materials.

EXFLON is very soft and extremely compressible with relatively light torque. It can be used in FRP, porcelain, plastic and glass lined vessels.

With an unlimited shelf life, EXFLON will not become brittle, age or otherwise deteriorate in the application. It is unaffected by UV, or ozone. The material is supplied in sheet form and can be easily cut into gaskets. Due to its non-sticking properties it is easily removed from flange surfaces

### TYPICAL PROPERTIES

Working Temperature : -200 Deg C to +260 Deg C

pH : 0-14

Compressibility : 68%

Recovery : 12%

Pressure Limit : Full Vacuum to 3000 psi

Flammability : Will not burn

Bacterial Growth : Will not support

### AVAILABILITY

Supplied in sheets 1500mm x 1500mm or cut into strips and gaskets to suit customer application.

Standard thicknesses : 1.5mm, 3.0mm & 6.0mm

Can be adhesive backed on request

The information given is based upon average values and is in no way intended as a warranty. The purchaser shall be responsible for determining the suitability of the product for any particular application.

Yorkshire Gaskets Ltd, Units 2 & 3 Lawefield Park, Lawefield Lane, Wakefield, West Yorkshire WF2 8ST  
Tel: 01924 200100, Fax: 01924 200123, Email: [sales@yorkshiregaskets.co.uk](mailto:sales@yorkshiregaskets.co.uk), [www.yorkshiregaskets.co.uk](http://www.yorkshiregaskets.co.uk)